CHANGE ORDER

CO-011: Solar Fence Orientation — Upright to Laid Down

Rodriguez Residence · Oak Valley Estates Lot 5 · Kanarraville, UT

CO NUMBER	DATE	CONTRACTOR
CO-011	March 21, 2026	TBD


SCOPE	COST IMPACT	STATUS
Solar Fence Structure	To Be Determined	Draft

Change Summary: Modify the solar fence panel orientation from **upright (portrait)** to **laid down (landscape)**. Panels will be rotated 90° so the long dimension runs horizontally along the fence line.


SCOPE OF CHANGE

- Rotate EG-NT66 705W panels from vertical (portrait) to horizontal (landscape) mounting.
- Adjust frame structure: 2×1 tube top/bottom rails and 2×2 vertical posts to accommodate landscape panel dimensions (2384mm × 1303mm laid down).
- Revise diagonal bracing (3/4×3/4×1/4 angle) as required for new orientation.
- Update junction box / cable routing — conductors on long edges (top and bottom rails) run full length to combiner at vault end.
- Coordination with electrical scope: DC conductor routing, combiner location, and conduit stub-ups remain per existing design unless otherwise revised.

FULL FENCE ELEVATION

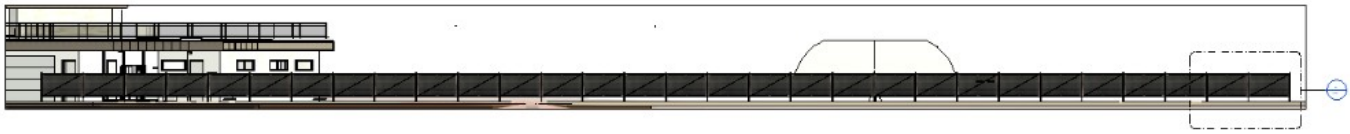

PANEL ASSEMBLY — LAID DOWN (LANDSCAPE)

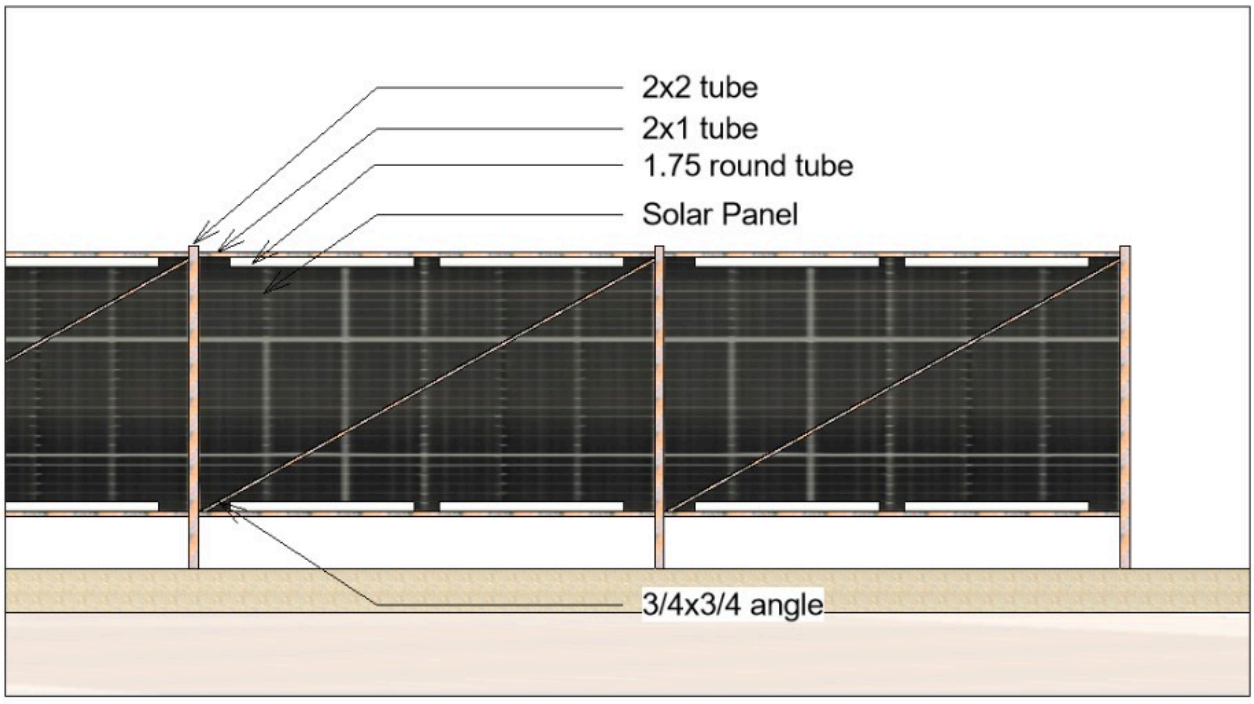

TECHNICAL NOTES

- Panel dimensions (landscape): 2384mm (93.86") × 1303mm (51.30") × 33mm frame.
- 30 panels in one straight line; ~71.5m (234.6') total horizontal run.
- Bifacial panels (BF) — East/West facing benefits from rear-side irradiance when laid down.

Cost impact: To be determined. Pricing will be provided by contractor upon review of revised structural drawings and scope.

OWNER / CLIENT AUTHORIZATION

Jessica & Adrian Rodriguez

Date: _____

RAC INC. AUTHORIZATION

RAC Inc.

Date: _____