PROPOSAL

Date: 05/28/2026

H & E DRYWALL

LIC .UT # 12226934-5501
LIC. NV# 20253484127

1018 S 1740 E
ST. GEORGE UT 84790

Email: hedrywall1022@gmail.com
Phone: 435-236-5652

Contractor: RAC development	**Project Manager:** Craig Engel
Subdivision:	**Job Name:** Rodriguez Residence
Job address: Liberty Lane Kannerville UT	**Lot # 5**

WE ARE SUBMITTING A DRYWALL JOB THAT INCLUDES THE FOLLOWING ITEMS:

DRYWALL. 1/2 Drywall Installation in the garage ceilings and walls.
1/2" Drywall installation in the main floor ceilings and wall.
1/2" Drywall installation in the second floor ceilings and walls.
1/2" Drywall installation in the basement ceilings and walls.
1/2" Densshield tile baker installation in the showers.
5/8" Exterior board in the porch ceilings.

CORNERS. Square or round Corners, contractor preference.
No Kerf Doors.
4 Way Window Wrap.

TAPING. Three Coat System used to prepare the Drywall for smooth wall level 4.

TEXTURE. Wall Finish : Level 4 Smooth finish.
Ceiling finish: Level 4 Smooth finish.
*The texture is varied and subjective. If it needs to approved by anyone, I must be notified BEFORE texturing is started and we will approve it with them.
*We are not responsible for retexturing or paint changes if someone doesn't like it after texturing is completed.

H&E DRYWALL LLC

CLEAN-UP. The garage floor will be masked off to protect it from the drywall mud.
Complete clean-up of drywall items.
The floors will be scraped and swept.


REPAIRS. One (1) final trip to fix nicks and dings no more than 3 small patches included. Additional repairs will be billed as a separate expense.
* Repairs resulting from poor framing, bowed walls, uneven trusses, etc. will be billed as a separate expense.
* If windows, pocket doors, or framing are added after hanging has begun, they will be billed as an extra expense.

NOTES.

- All material is guaranteed to be as specified, and the above work to be performed in accordance with the drawings and specifications submitted for above work and completed in substantial workman like manner for the sum of. See below pricing.
- Our workers are fully covered by Workman's Compensation Insurance.Materials for other trades should not be delivered while we are working. We are not responsible for damages.
- Doors should be covered and protected. We are not responsible for damages.
- Tubs should be covered with a hard surface that can be walked on. We are not responsible for damages.
- Our estimates include all labor,materials and supplies.
- This proposal is automatically void if not accepted by signature below within **30** days.

*Signature*_____*Date* _____ **PRICE:$45,200.00**

Invoices should be paid in full 30 days after the texture is complete. 2% charge a month for late payments

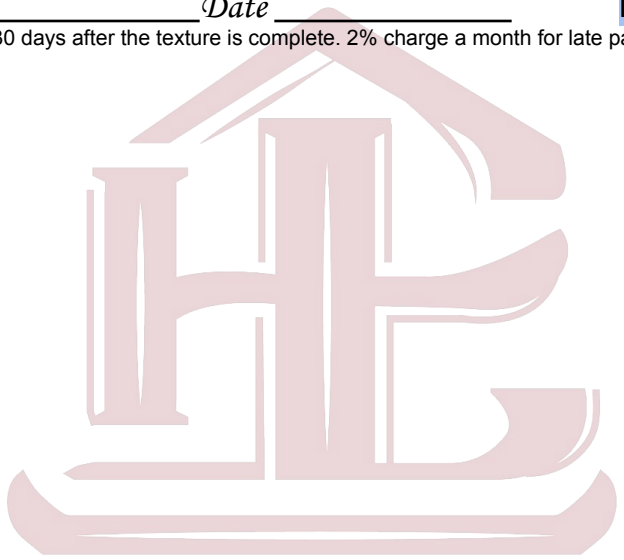

H&E DRYWALL LLC