
Job	Truss	Truss Type	Qty	Ply	Rodriguez Residence
254084-MF	F1	Floor	11	1	Job Reference (optional)

Run: 25.10 S May 12 2025 Print: 25.1.0 S May 12 2025 MiTek Industries, Inc. Mon Mar 09 23:04:04 Page: 1
ID:Ftoa6HPKGxr4aeYPHbn4HJzhY6w-Tz92vL5fl7YnHrj7WpBX3LCJCt97jCMz00Ez3szcVsv

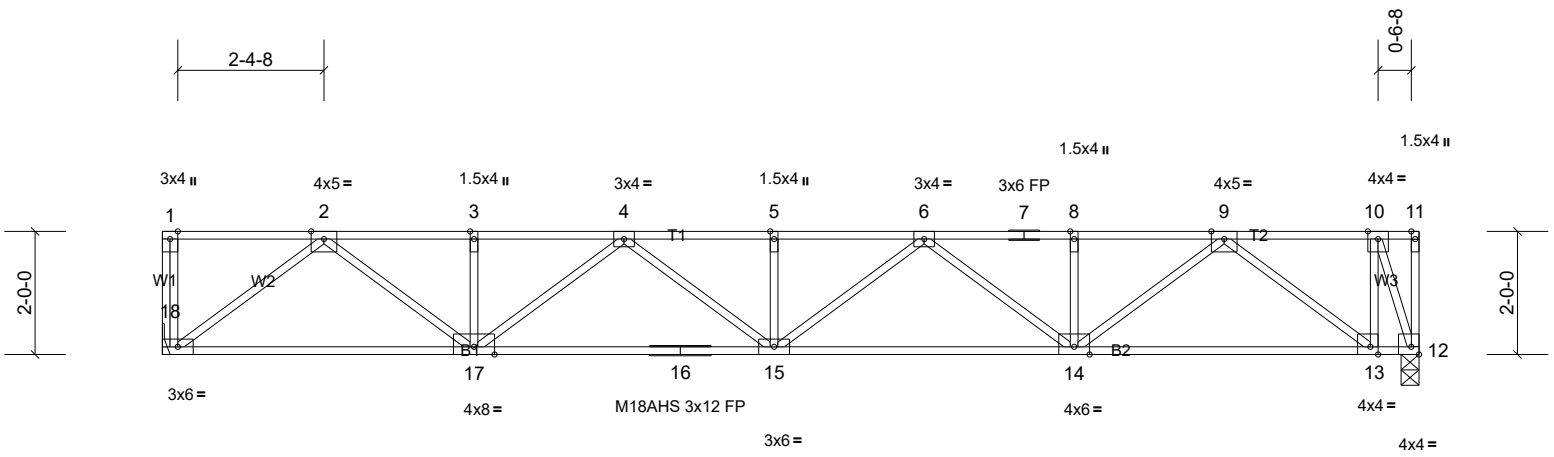

10-0-0 10-0-0

Scale = 1:37.4

Plate Offsets (X, Y): [12:Edge,0-1-8], [13:0-1-8,Edge]

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL	40.0	Plate Grip DOL	1.00	TC	0.30	Vert(LL)	-0.17	15	>999	360	M18AHS	169/162
TCDL	11.0	Lumber DOL	1.00	BC	0.68	Vert(CT)	-0.26	14-15	>937	240	MT20	220/195
BCLL	0.0	Rep Stress Incr	YES	WB	0.48	Horz(CT)	0.06	12	n/a	n/a		
BCDL	7.0	Code	IRC2021/TPI2014	Matrix-AS							Weight: 106 lb	FT = 20%F, 11%E

LUMBER
TOP CHORD 2x4 DF No.2(flat)
BOT CHORD 2x4 DF No.2(flat)
WEBS 2x4 DF Stud(flat)

BRACING
TOP CHORD Structural wood sheathing directly applied, except end verticals.
BOT CHORD Rigid ceiling directly applied.

REACTIONS (lb/size) 12=1173/0-3-8, (min. 0-1-8), 18=1173/ Mechanical


FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-3=-2374/0, 3-4=-2374/0, 4-5=-3195/0, 5-6=-3195/0, 6-7=-2554/0, 7-8=-2554/0, 8-9=-2554/0, 9-10=-434/0
BOT CHORD 17-18=0/1391, 16-17=0/2949, 15-16=0/2949, 14-15=0/3038, 13-14=0/1660, 12-13=0/434
WEBS 2-18=-1738/0, 2-17=0/1241, 4-17=-725/0, 4-15=0/311, 6-14=-610/0, 9-14=0/1129, 9-13=-1546/0, 10-13=0/1011, 10-12=-1299/0

NOTES
1) All plates are MT20 plates unless otherwise indicated.
2) Refer to girder(s) for truss to truss connections.
3) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
4) Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.

LOAD CASE(S) Standard

Job	Truss	Truss Type	Qty	Ply	Rodriguez Residence
254084-MF	F2	Floor	2	1	Job Reference (optional)

Run: 25.10 S May 12 2025 Print: 25.1.0 S May 12 2025 MiTek Industries, Inc. Mon Mar 09 23:04:05 Page: 1
ID:41AsMLU5rnbEIZ?ZesuUWazhY6q-xAiQ7h6I3Qgeu?IK4WimcZlUbHZRSiF7Fg_XbIzcVsu

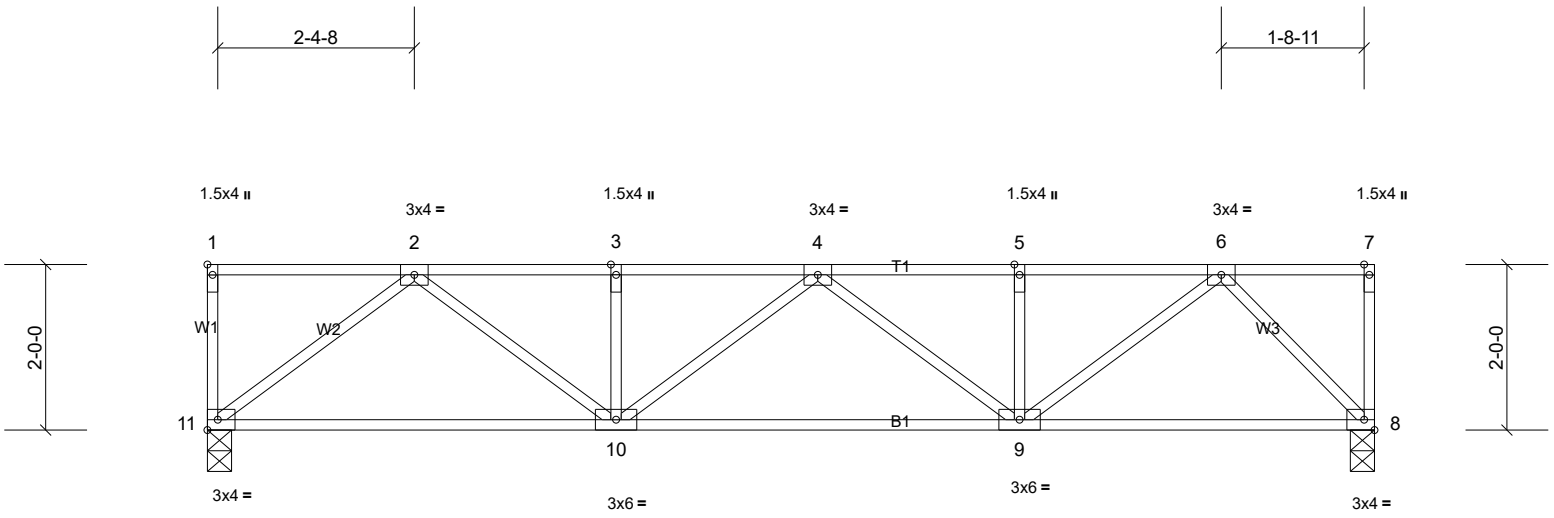

10-0-0 10-0-0

Scale = 1:27.8

Plate Offsets (X, Y): [1:Edge,0-0-12]

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL	40.0	Plate Grip DOL	1.00	TC	0.26	Vert(LL)	-0.04	9-10	>999	360	MT20	220/195
TCDL	11.0	Lumber DOL	1.00	BC	0.42	Vert(CT)	-0.09	10-11	>999	240		
BCLL	0.0	Rep Stress Incr	YES	WB	0.31	Horz(CT)	0.02	8	n/a	n/a		
BCDL	7.0	Code	IRC2021/TPI2014	Matrix-AS							Weight: 71 lb	FT = 20%F, 11%E

LUMBER
TOP CHORD 2x4 DF No.2(flat)
BOT CHORD 2x4 DF No.2(flat)
WEBS 2x4 DF Stud(flat)

BRACING
TOP CHORD Structural wood sheathing directly applied, except end verticals.
BOT CHORD Rigid ceiling directly applied.


REACTIONS (lb/size) 8=811/0-3-8, (min. 0-1-8), 11=811/0-3-8, (min. 0-1-8)

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-3=-1412/0, 3-4=-1412/0, 4-5=-1313/0, 5-6=-1313/0
BOT CHORD 10-11=0/889, 9-10=0/1526, 8-9=0/688
WEBS 2-11=-1122/0, 2-10=0/660, 4-9=-269/0, 6-9=0/789, 6-8=-996/0

NOTES
1) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
2) Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.

LOAD CASE(S) Standard

Job	Truss	Truss Type	Qty	Ply	Rodriguez Residence
254084-MF	F3	Floor Supported Gable	1	1	Job Reference (optional)

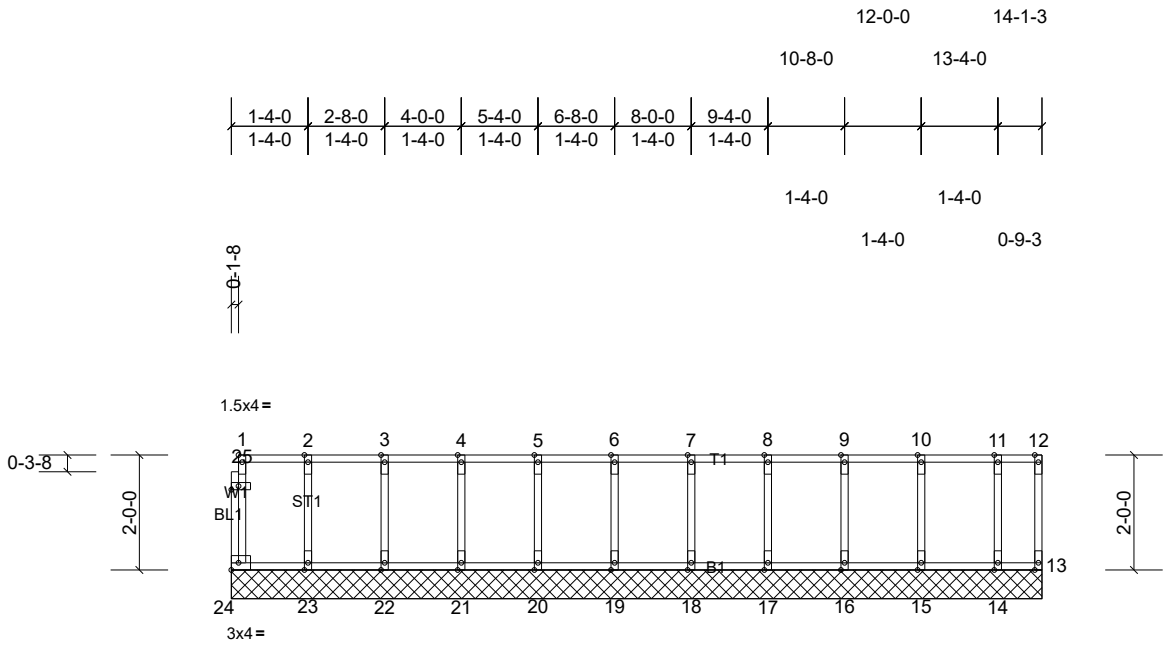

Scale = 1:40.1

10-0-0

Plate Offsets (X, Y): [1:Edge,0-0-12], [25:0-1-8,0-0-12]

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL	40.0	Plate Grip DOL	1.00	TC	0.06	Vert(LL)	n/a	-	n/a	999	MT20	220/195
TCDL	11.0	Lumber DOL	1.00	BC	0.01	Vert(TL)	n/a	-	n/a	999		
BCLL	0.0	Rep Stress Incr	YES	WB	0.03	Horiz(TL)	n/a	-	n/a	n/a		
BCDL	7.0	Code	IRC2021/TPI2014	Matrix-AS							Weight: 69 lb	FT = 20%F, 11%E

LUMBER

TOP CHORD	2x4 DF No.2(flat)
BOT CHORD	2x4 DF No.2(flat)
WEBS	2x4 DF Stud(flat)
OTHERS	2x4 DF Stud(flat)

BRACING

TOP CHORD	Structural wood sheathing directly applied, except end verticals.
BOT CHORD	Rigid ceiling directly applied.

REACTIONS All bearings 14-1-3.
(lb) - Max Grav All reactions 250 (lb) or less at joint(s) 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.


NOTES

1) All plates are 1.5x4 (||) MT20 unless otherwise indicated.
2) Gable requires continuous bottom chord bearing.
3) Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
4) Gable studs spaced at 1-4-0 oc.
5) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
6) Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
7) CAUTION, Do not erect truss backwards.

LOAD CASE(S) Standard

Job	Truss	Truss Type	Qty	Ply	Rodriguez Residence
254084-MF	F4	Floor	6	1	Job Reference (optional)

Run: 25.10 S May 12 2025 Print: 25.1.0 S May 12 2025 MiTek Industries, Inc. Mon Mar 09 23:04:05 Page: 1
ID:41AsMLU5rnbEIZ?ZesuUWazhY6q-xAiQ7h6I3Qgeu?IK4WimcZlUGHXESeq7Fg_XbIzcVsu

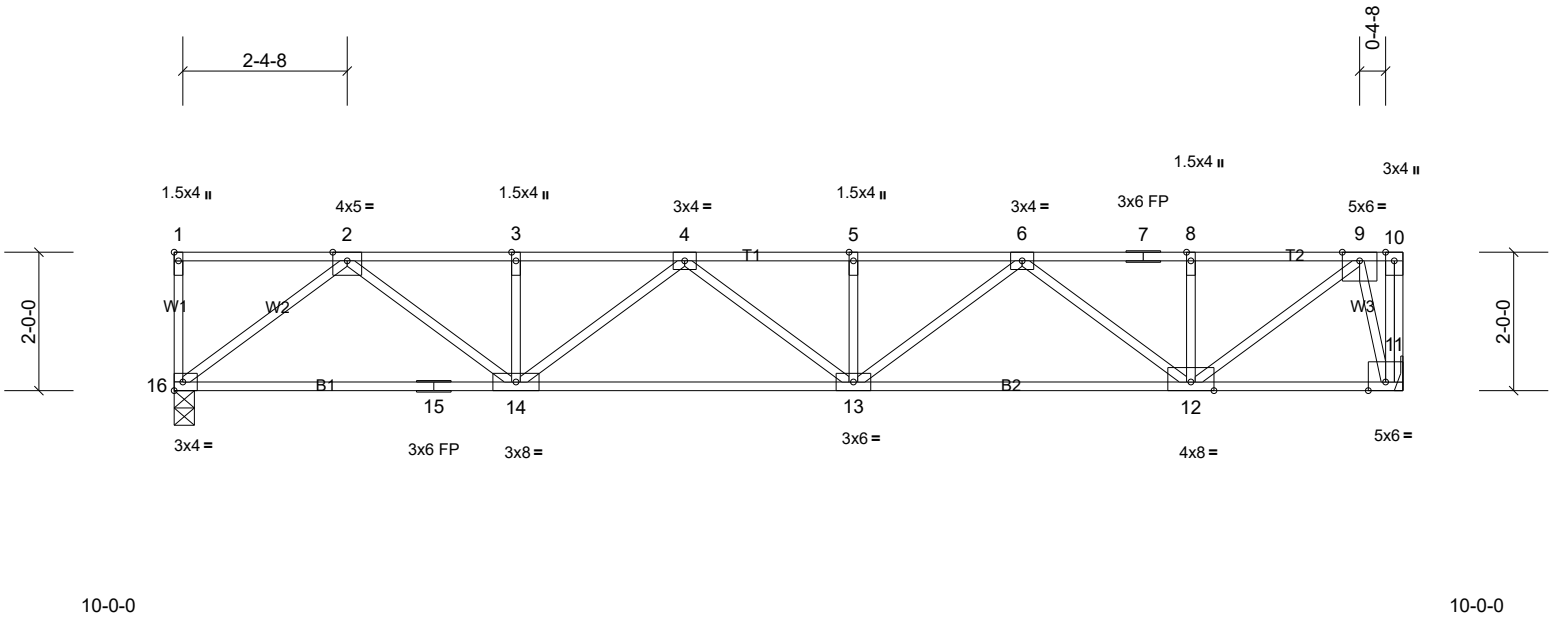

10-0-0 10-0-0

Scale = 1:33.3

Plate Offsets (X, Y): [1:Edge,0-0-12]

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL	40.0	Plate Grip DOL	1.00	TC	0.28	Vert(LL)	-0.10	13-14	>999	360	MT20	220/195
TCDL	11.0	Lumber DOL	1.00	BC	0.56	Vert(CT)	-0.16	12-13	>999	240		
BCLL	0.0	Rep Stress Incr	YES	WB	0.53	Horz(CT)	0.04	11	n/a	n/a		
BCDL	7.0	Code	IRC2021/TPI2014	Matrix-AS							Weight: 93 lb	FT = 20%F, 11%E

LUMBER
TOP CHORD 2x4 DF No.2(flat)
BOT CHORD 2x4 DF No.2(flat)
WEBS 2x4 DF Stud(flat)

BRACING
TOP CHORD Structural wood sheathing directly applied, except end verticals.
BOT CHORD Rigid ceiling directly applied.

REACTIONS (lb/size) 11=1019/ Mechanical, 16=1019/0-3-8, (min. 0-1-8)


FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-3=-1953/0, 3-4=-1953/0, 4-5=-2393/0, 5-6=-2393/0, 6-7=-1366/0, 7-8=-1366/0, 8-9=-1366/0
BOT CHORD 15-16=0/1160, 14-15=0/1160, 13-14=0/2337, 12-13=0/2041, 11-12=0/282
WEBS 2-16=-1463/0, 2-14=0/1000, 4-14=-484/0, 6-13=0/444, 6-12=-851/0, 8-12=-254/0, 9-12=0/1368, 9-11=-1095/0

NOTES
1) Refer to girder(s) for truss to truss connections.
2) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
3) Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.

LOAD CASE(S) Standard

Job	Truss	Truss Type	Qty	Ply	Rodriguez Residence
254084-MF	F5	Floor	4	1	Job Reference (optional)

Run: 25.10 S May 12 2025 Print: 25.1.0 S May 12 2025 MiTek Industries, Inc. Mon Mar 09 23:04:05 Page: 1
ID:41AsMLU5rnbEIZ?ZesuUWazhY6q-xAiQ7h6I3Qgeu?lK4WimcZlUQHbISjq7Fg_XbIzcVsu

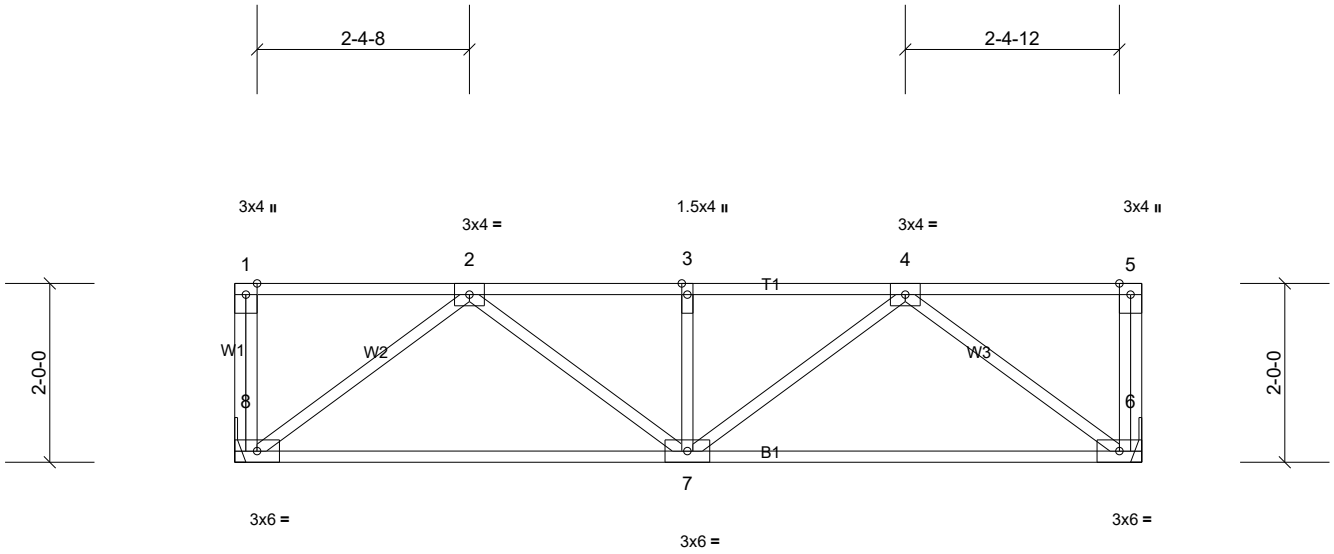

Scale = 1:25.8

10-0-0 10-0-0

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL	40.0	Plate Grip DOL	1.00	TC	0.27	Vert(LL)	-0.01	7	>999	360	MT20	220/195
TCDL	11.0	Lumber DOL	1.00	BC	0.30	Vert(CT)	-0.06	6-7	>999	240		
BCLL	0.0	Rep Stress Incr	YES	WB	0.21	Horz(CT)	0.01	6	n/a	n/a		
BCDL	7.0	Code	IRC2021/TPI2014	Matrix-AS							Weight: 55 lb	FT = 20%F, 11%E

LUMBER
TOP CHORD 2x4 DF No.2(flat)
BOT CHORD 2x4 DF No.2(flat)
WEBS 2x4 DF Stud(flat)

BRACING
TOP CHORD Structural wood sheathing directly applied, except end verticals.
BOT CHORD Rigid ceiling directly applied.


REACTIONS (lb/size) 6=574/ Mechanical, 8=574/ Mechanical

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-3=-800/0, 3-4=-800/0
BOT CHORD 7-8=0/595, 6-7=0/598
WEBS 2-8=-744/0, 2-7=0/258, 4-7=0/254, 4-6=-746/0

NOTES
1) Refer to girder(s) for truss to truss connections.
2) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
3) Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.

LOAD CASE(S) Standard

Job	Truss	Truss Type	Qty	Ply	Rodriguez Residence
254084-MF	F6	Floor Supported Gable	1	1	Job Reference (optional)

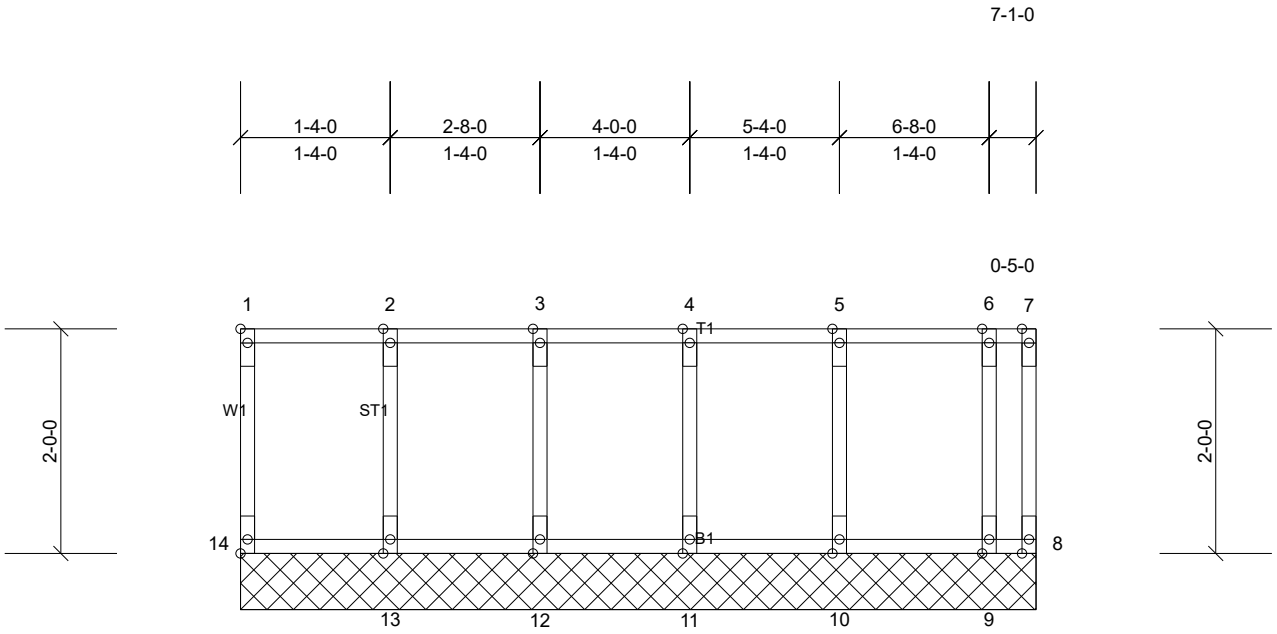

Scale = 1:20.5

10-0-0

Plate Offsets (X, Y): [1:Edge,0-0-12], [14:Edge,0-0-12]

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL	40.0	Plate Grip DOL	1.00	TC	0.07	Vert(LL)	n/a	-	n/a	999	MT20	220/195
TCDL	11.0	Lumber DOL	1.00	BC	0.01	Vert(TL)	n/a	-	n/a	999		
BCLL	0.0	Rep Stress Incr	YES	WB	0.03	Horiz(TL)	n/a	-	n/a	n/a		
BCDL	7.0	Code	IRC2021/TPI2014	Matrix-AS							Weight: 36 lb	FT = 20%F, 11%E

LUMBER

TOP CHORD	2x4 DF No.2(flat)
BOT CHORD	2x4 DF No.2(flat)
WEBS	2x4 DF Stud(flat)
OTHERS	2x4 DF Stud(flat)

BRACING

TOP CHORD	Structural wood sheathing directly applied, except end verticals.
BOT CHORD	Rigid ceiling directly applied.

REACTIONS All bearings 7-1-0.
(lb) - Max Grav All reactions 250 (lb) or less at joint(s) 8, 9, 10, 11, 12, 13, 14

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.


NOTES

1) All plates are 1.5x4 (||) MT20 unless otherwise indicated.
2) Gable requires continuous bottom chord bearing.
3) Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
4) Gable studs spaced at 1-4-0 oc.
5) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
6) Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.

LOAD CASE(S) Standard

Job	Truss	Truss Type	Qty	Ply	Rodriguez Residence
254084-MF	F7	Floor	4	1	Job Reference (optional)

Run: 25.10 S May 12 2025 Print: 25.1.0 S May 12 2025 MiTek Industries, Inc. Mon Mar 09 23:04:06 Page: 1
ID:41AsMLU5rnbEIZ?ZesuUWazhY6q-PMGoK17wpkoUW9tWdEE?8mHfUgyUBCUGTKj48lzcVst

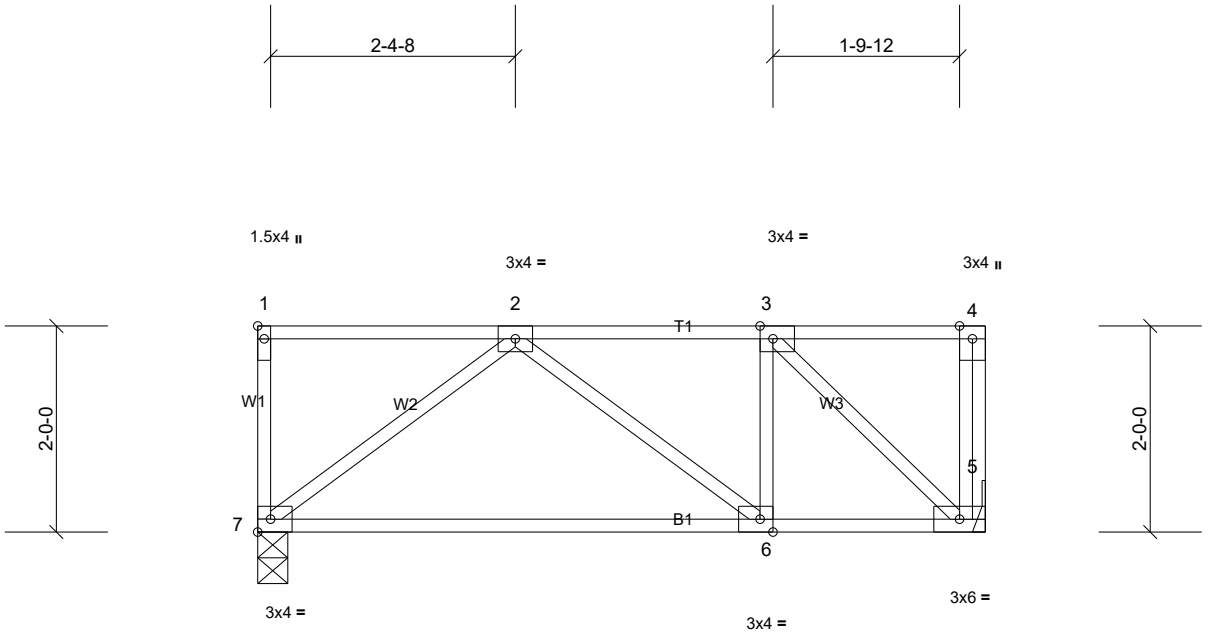

Scale = 1:22.4

10-0-0 10-0-0

Plate Offsets (X, Y): [1:Edge,0-0-12], [3:0-1-8,Edge], [6:0-1-8,Edge]

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL	40.0	Plate Grip DOL	1.00	TC	0.25	Vert(LL)	0.00	6-7	>999	360	MT20	220/195
TCDL	11.0	Lumber DOL	1.00	BC	0.24	Vert(CT)	-0.07	6-7	>999	240		
BCLL	0.0	Rep Stress Incr	YES	WB	0.12	Horz(CT)	0.00	5	n/a	n/a		
BCDL	7.0	Code	IRC2021/TPI2014	Matrix-AS							Weight: 40 lb	FT = 20%F, 11%E

LUMBER
TOP CHORD 2x4 DF No.2(flat)
BOT CHORD 2x4 DF No.2(flat)
WEBS 2x4 DF Stud(flat)

BRACING
TOP CHORD Structural wood sheathing directly applied, except end verticals.
BOT CHORD Rigid ceiling directly applied.


REACTIONS (lb/size) 5=399/ Mechanical, 7=399/0-3-8, (min. 0-1-8)

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-3=-342/0
BOT CHORD 6-7=0/354, 5-6=0/342
WEBS 2-7=-446/0, 3-5=-469/0

NOTES
1) Refer to girder(s) for truss to truss connections.
2) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
3) Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.

LOAD CASE(S) Standard

Job	Truss	Truss Type	Qty	Ply	Rodriguez Residence
254084-MF	F8	Floor	2	1	Job Reference (optional)

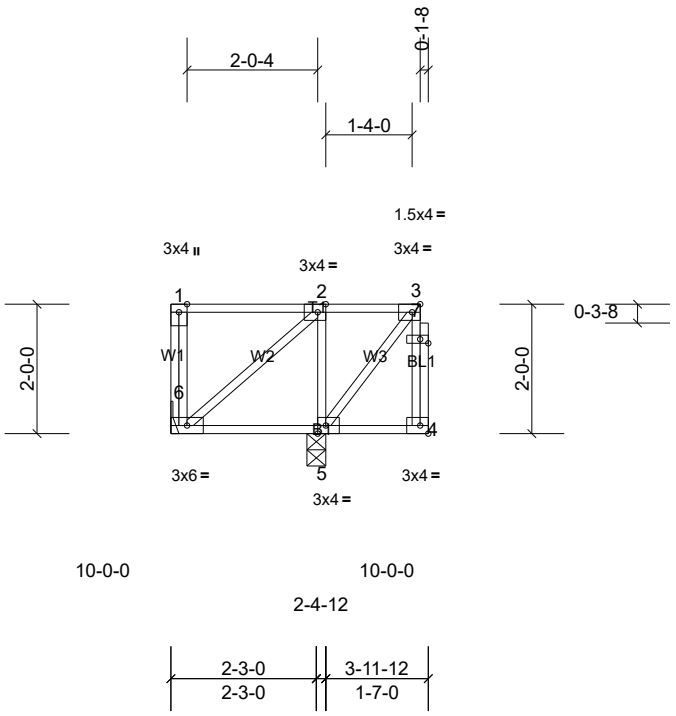

Scale = 1:35.6

Plate Offsets (X, Y): [2:0-1-8,Edge], [3:0-1-8,Edge], [5:0-1-8,Edge], [7:0-1-8,0-0-12]

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL	40.0	Plate Grip DOL	1.00	TC	0.23	Vert(LL)	n/a	-	n/a	999	MT20	220/195
TCDL	11.0	Lumber DOL	1.00	BC	0.03	Vert(CT)	0.00	5-6	>999	240		
BCLL	0.0	Rep Stress Incr	YES	WB	0.06	Horz(CT)	n/a	-	n/a	n/a		
BCDL	7.0	Code	IRC2021/TPI2014	Matrix-MP							Weight: 29 lb	FT = 20%F, 11%E

LUMBER

TOP CHORD	2x4 DF No.2(flat)
BOT CHORD	2x4 DF No.2(flat)
WEBS	2x4 DF Stud(flat)
OTHERS	2x4 DF Stud(flat)

BRACING

TOP CHORD	Structural wood sheathing directly applied or 3-11-12 oc purlins, except end verticals.
BOT CHORD	Rigid ceiling directly applied or 6-0-0 oc bracing.

REACTIONS (lb/size) 5=355/0-3-8, (min. 0-1-8), 6=71/ Mechanical
Max Uplift 6=-17 (LC 4)
Max Grav 5=355 (LC 1), 6=110 (LC 3)

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
WEBS 2-5=-273/0


NOTES

1) Unbalanced floor live loads have been considered for this design.
2) Refer to girder(s) for truss to truss connections.
3) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 17 lb uplift at joint 6.
4) Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
5) CAUTION, Do not erect truss backwards.

LOAD CASE(S) Standard

Job	Truss	Truss Type	Qty	Ply	Rodriguez Residence
254084-MF	F9	Floor Supported Gable	1	1	Job Reference (optional)

Run: 25.10 S May 12 2025 Print: 25.1.0 S May 12 2025 MiTek Industries, Inc. Mon Mar 09 23:04:06 Page: 1
ID:41AsMLU5rnbEIZ?ZesuUWazhY6q-PMGoK17wpkoUW9tWdEE?8mHiTg?4BDuGTKj48lzcVst

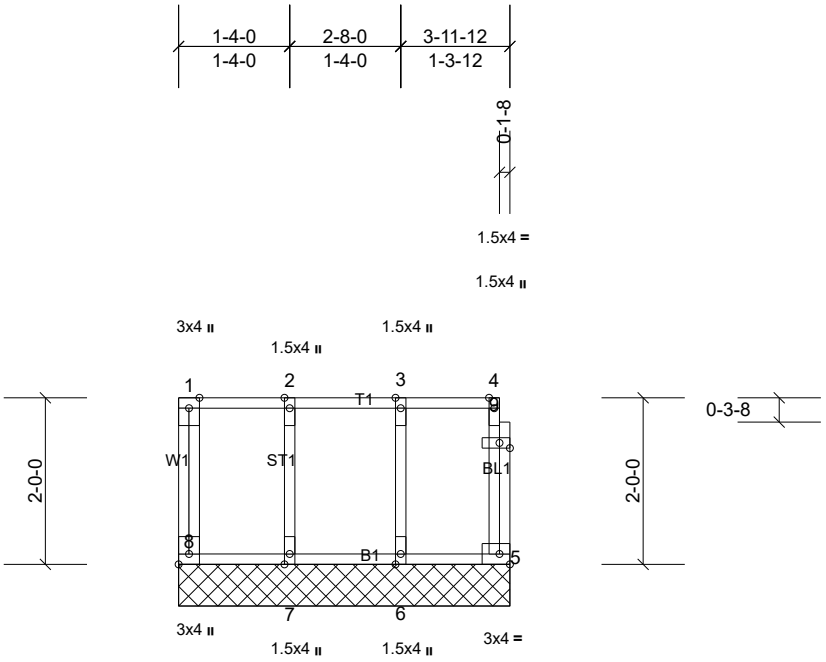

Scale = 1:27.7

10-0-0

Plate Offsets (X, Y): [8:Edge,0-1-8], [9:0-1-8,0-0-12]

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL	40.0	Plate Grip DOL	1.00	TC	0.06	Vert(LL)	n/a	-	n/a	999	MT20	220/195
TCDL	11.0	Lumber DOL	1.00	BC	0.01	Vert(TL)	n/a	-	n/a	999		
BCLL	0.0	Rep Stress Incr	YES	WB	0.03	Horiz(TL)	n/a	-	n/a	n/a		
BCDL	7.0	Code	IRC2021/TPI2014	Matrix-MR							Weight: 25 lb	FT = 20%F, 11%E

LUMBER

TOP CHORD	2x4 DF No.2(flat)
BOT CHORD	2x4 DF No.2(flat)
WEBS	2x4 DF Stud(flat)
OTHERS	2x4 DF Stud(flat)

BRACING

TOP CHORD	Structural wood sheathing directly applied or 3-11-12 oc purlins, except end verticals.
BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS All bearings 3-11-12.
(lb) - Max Grav All reactions 250 (lb) or less at joint(s) 5, 6, 7, 8

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.


NOTES

1) Gable requires continuous bottom chord bearing.
2) Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
3) Gable studs spaced at 1-4-0 oc.
4) Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
5) CAUTION, Do not erect truss backwards.

LOAD CASE(S) Standard

Job	Truss	Truss Type	Qty	Ply	Rodriguez Residence
254084-MF	F10	Floor	2	1	Job Reference (optional)

Run: 25.10 S May 12 2025 Print: 25.1.0 S May 12 2025 MiTek Industries, Inc. Mon Mar 09 23:04:06 Page: 1
ID:41AsMLU5rnbEIZ?ZesuUWazhY6q-PMGoK17wpkoUW9tWdEE?8mHfUgzPBDZGTKj48lzcVst

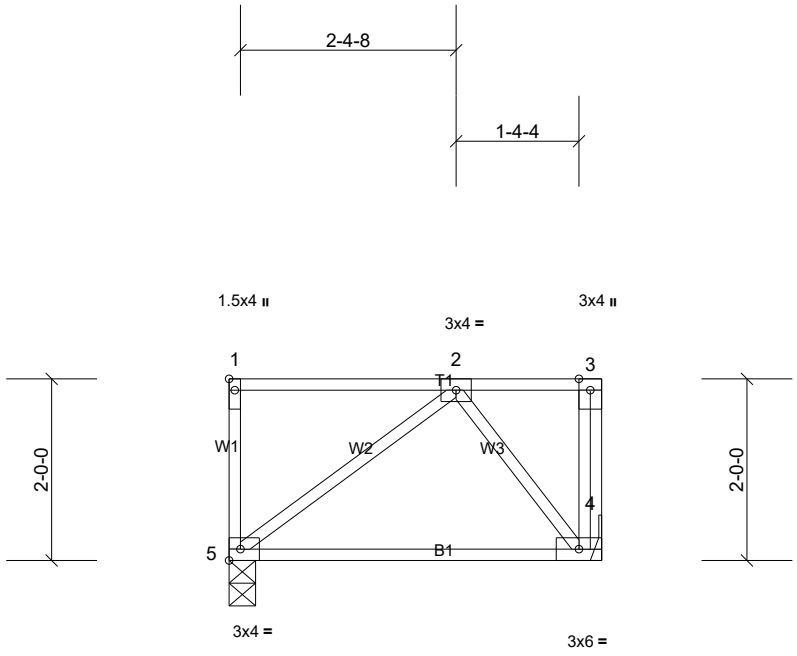

Scale = 1:25.4

10-0-0 10-0-0

Plate Offsets (X, Y): [1:Edge,0-0-12]

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL	40.0	Plate Grip DOL	1.00	TC	0.25	Vert(LL)	n/a	-	n/a	999	MT20	220/195
TCDL	11.0	Lumber DOL	1.00	BC	0.18	Vert(CT)	-0.05	4-5	>999	240		
BCLL	0.0	Rep Stress Incr	YES	WB	0.05	Horz(CT)	0.00	4	n/a	n/a		
BCDL	7.0	Code	IRC2021/TPI2014	Matrix-AS							Weight: 25 lb	FT = 20%F, 11%E

LUMBER

TOP CHORD	2x4 DF No.2(flat)
BOT CHORD	2x4 DF No.2(flat)
WEBS	2x4 DF Stud(flat)

BRACING

TOP CHORD	Structural wood sheathing directly applied, except end verticals.
BOT CHORD	Rigid ceiling directly applied.

REACTIONS (lb/size) 4=227/ Mechanical, 5=227/0-3-8, (min. 0-1-8)


FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES

1) Refer to girder(s) for truss to truss connections.
2) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
3) Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.

LOAD CASE(S) Standard

Job	Truss	Truss Type	Qty	Ply	Rodriguez Residence
254084-MF	F11	Floor Supported Gable	1	1	Job Reference (optional)

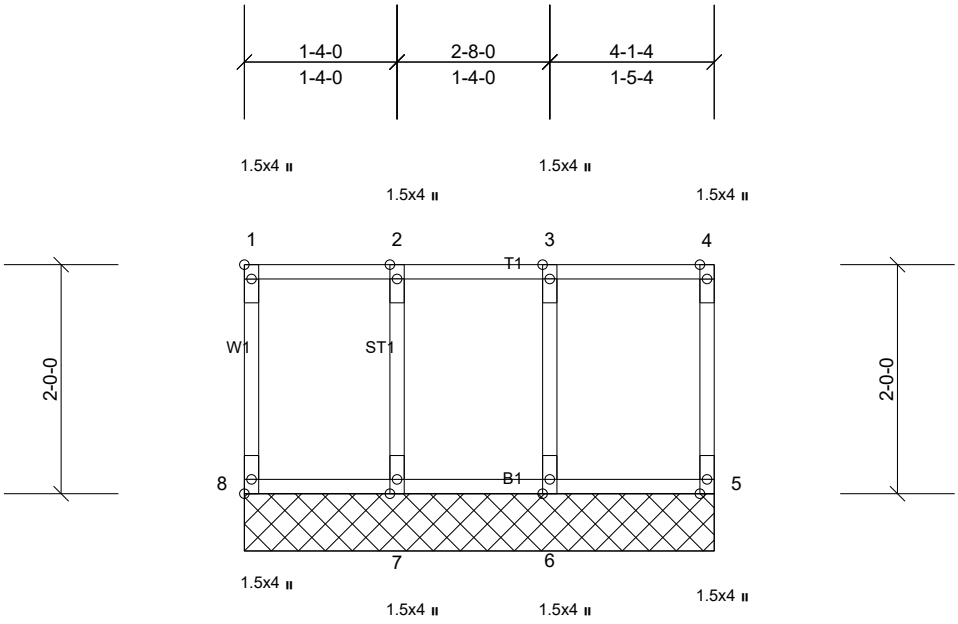

Scale = 1:20.1

10-0-0

Plate Offsets (X, Y): [1:Edge,0-0-12], [8:Edge,0-0-12]

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL	40.0	Plate Grip DOL	1.00	TC	0.07	Vert(LL)	n/a	-	n/a	999	MT20	220/195
TCDL	11.0	Lumber DOL	1.00	BC	0.01	Vert(TL)	n/a	-	n/a	999		
BCLL	0.0	Rep Stress Incr	YES	WB	0.03	Horiz(TL)	n/a	-	n/a	n/a		
BCDL	7.0	Code	IRC2021/TPI2014	Matrix-AS							Weight: 21 lb	FT = 20%F, 11%E

LUMBER

TOP CHORD	2x4 DF No.2(flat)
BOT CHORD	2x4 DF No.2(flat)
WEBS	2x4 DF Stud(flat)
OTHERS	2x4 DF Stud(flat)

BRACING

TOP CHORD	Structural wood sheathing directly applied, except end verticals.
BOT CHORD	Rigid ceiling directly applied.

REACTIONS All bearings 4-1-4.
(lb) - Max Grav All reactions 250 (lb) or less at joint(s) 5, 6, 7, 8

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES

1) Gable requires continuous bottom chord bearing.
2) Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
3) Gable studs spaced at 1-4-0 oc.
4) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
5) Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.

LOAD CASE(S) Standard